

# S-VIDEO EXTENDER

Extend a S-Video TV/monitor up to 600 feet away from a S-Video device

## Available option:

- **Audio**

**Built-In Surge Protection**



**XTENDEX® ST-C5SV-600 (Remote and Local Units)**

## Features & Applications

The XTENDEX® S-Video Extender transmits S-Video locally and remotely up to 600 feet away from a S-Video device using CAT5/5e/6 cable. Each video extender consists of a local unit connected to a S-Video device and a local monitor, and a remote unit connected to a monitor or TV.

- Ideal solution for digital signage applications.
- Supports maximum 800x600 S-Video resolution.
- Built-in surge protection.
- Supports local and remote S-Video monitor/TV.
- Available with optional stereo audio.
- Use in-house CAT5/5e/6 phone wiring to locate a display remotely.

## Specifications

### Local Unit

#### Host Connection

- Supports computers and video devices with S-Video output.
- Male 4-pin miniDIN connector.
- Optional stereo audio support – dual RCA audio plugs.

#### Local Access

- Crisp and clear 800x600 video resolution.
- Female 4-pin miniDIN connector for local monitor/TV.
- Optional stereo audio support – 3.5mm stereo jack.


### Remote Unit

- Crisp and clear 800x600 resolution at 600 feet.
- Female 4-pin miniDIN connector.
- Optional 3.5mm stereo audio connection.

### Cables

- Use CAT5, CAT5e or CAT6 UTP straight through cable for TIA/EIA-568B wiring terminated with standard RJ45 connectors.
- Cables not included.

### Configuration and Cable Illustration

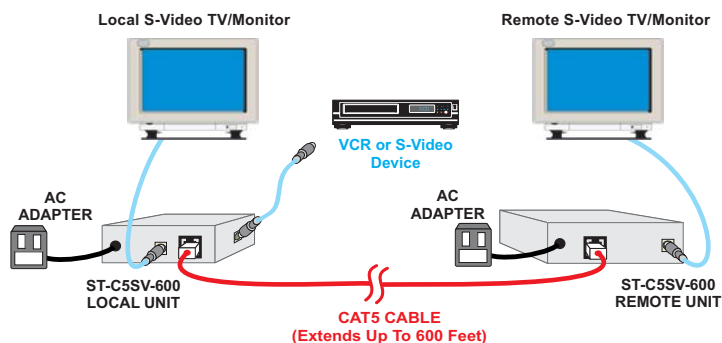

### Video Quality Adjustment

- Video quality adjustment for different lengths of CAT5/5e/6 cable is done manually for the video-only extender and automatically for the audio/video.
- Push buttons on side adjust video quality on video-only units.
  - The setting is automatically saved to the unit. The next time the unit is powered the adjustment will be recalled.

### Power

- 110 or 220 VAC at 50 or 60 Hz via AC adapter.
- Power consumption: 10W (each – local and remote unit)

### Regulatory Approvals

- CE, FCC, RoHS

### Warranty

- Two years

## Audio Option

- Stereo audio can be heard both locally and remotely.
- Frequency response: 20 Hz to 20 kHz, +/-1 dB.
- Signal-to-Noise Ratio (SNR): 76 dBA.
- Total Harmonic Distortion and Noise (THD+N): 0.017%.
- Stereo crosstalk: -70 dB.
- Input impedance: 10k Ohms.
- Line level output; supports multimedia speakers.
  - CD quality audio output.
- Maximum I/O levels: 3.1Vp-p (line level).
- Requires powered speakers.

### S-Video Extender Models

Supported Features	NTI Part #	Local and Remote Unit Sizes WxDxH (in)
S-Video only	ST-C5SV-600	3.5x3.1x1.2
S-Video + audio	ST-C5SVA-600	3.5x3.1x1.2